

**BEACONS,  
BATTERIES &  
ELECTRICAL  
PRODUCTS**



# THE ELECTRICAL BOOK

---

**RIGHT PART,  
ON TIME,  
EVERY TIME.**



**98% OTIF** *DELIVERED ON TIME  
& IN FULL*



**ORDER BY 4:30PM  
FOR NEXT DAY  
DELIVERY**

# ATE BEACONS AND ELECTRICAL



Our range of beacons and safety products have been specially developed for work vehicles and construction plant. With everything from LED beacons right through to ergonomic ratchet straps, we have the products you need to ensure your visibility and safety on the road. We also stock a range of R65-approved beacons to help ensure you are highway compliant.

Our team are available to offer a helping hand when selecting the right products for your vehicle or construction plant machinery. Contact our team today on **01206 795949** to discuss your needs.

## WE ARE ON-HAND TO HELP

### PARTSCHAT

Discuss your requirements online.

### DELIVERY24

Place orders before 4:30pm for next working day delivery\*.

### PARTSFINDER

Use PartsFinder to locate the right part on time, every time.

### TRADE ACCOUNT

Set up your FREE trade account to receive trade discounts.



\*Next working day delivery is guaranteed for UK mainland customers only and on orders placed before 4:30pm.

# CONTENTS

LED Beacons	4
Seat Belt Indicators and Beacon Spares	7
The Dual Beacon	8
Lightbars	9
Surface-Mounted Beacons	11
Electrical Tester	12
Worklamps	13
Horns	14
Reverse Alarms and Camera Systems	15
Batteries & Accessories	17

# LED BEACONS

## 12/24V LED Pole Mount

- 60 SMDs
- 3 selectable flash patterns
- DC 12-24 V
- ECE R10 approved
- IP66 dust & water protection
- -30°C to +50°C temperature range
- Reverse polarity protection



Colour	Code
Amber	30.3023
Green	30.3023-G
Purple	30.3023-P

## 12/24V LED Flexi Pole Mount

- 60 SMDs
- 3 selectable flash patterns
- DC 12-24 V
- ECE R10 approved
- IP66 dust & water protection
- -30°C to +50°C temperature range
- Reverse polarity protection



Colour	Code
Amber	30.3024
Green	30.3024-G
Purple	30.3024-P

## 12/24V Single Bolt (M10)

- 60 SMDs
- 3 selectable flash patterns
- DC 12-24 V
- ECE R10 approved
- IP66 dust & water protection
- -30°C to +50°C temperature range
- Reverse polarity protection



Colour	Code
Amber	30.3025
Green	30.3025-G
Purple	30.3025-P

## 12/24V LED Magnetic/3 Bolt

- 60 SMDs
- 3 selectable flash patterns
- DC 12-24 V
- ECE R10 approved
- IP66 dust & water protection
- -30°C to +50°C temperature range
- Reverse polarity protection
- Complete with cigar plug & cable

**MAGNET TESTED TO 70 MPH!**



Colour	Code
Amber	30.3026
Green	30.3026-G
Purple	30.3026-P

## Battery Magnetic (batteries not incl.)

- 16 SMDs with magnetic base
- 5 selectable flash patterns
- ECE R10 approved
- IP66 dust & water protection
- 4 size AA batteries (not included)
- Operation time 260-300 hours
- Photocell options to use beacon - automatically turn off/on during day or night



Colour	Code
Amber	30.3044

## LED Beacon Lens

- Replacement lens for the Proline® LED Beacons
- Polycarbonate
- Full screw-on thread for effective watertight connection
- Type-specific LED



Colour	Code
Amber	30.2019
Green	30.2018
Purple	30.2021

# LED & ROTATING BEACONS

## 12/24V LED Magnetic/3 Bolt

- Low-profile
- Dual-voltage 12/24 V
- 3 flash patterns
- 18 SMDs
- IP66
- Magnetic mounting
- ECE R10 approved
- -30°C to +60°C temperature range



Colour	Code
Amber	30.3045
Green	30.3045-G

## 12/24V LED Flexi Pole Mount


- Low-profile
- Dual-voltage 12/24 V
- 1 flash pattern
- 18 SMDs
- IP66
- Flexi din mounting
- ECE R10 approved
- -30°C to +60°C temperature range



Colour	Code
Amber	30.3046
Green	30.3046-G

## 12/24V LED Single Bolt (M10)

- Low-profile
- Dual-voltage 12/24 V
- 3 flash patterns
- 18 SMDs
- IP66
- Single bolt mounting
- ECE R10 approved
- -30°C to +60°C temperature range



Colour	Code
Amber	30.3048
Green	30.3048-G

## 12/24V R65 LED 3-Bolt Low Profile Beacon



Code
30.3040

## LED Beacon

- High profile high visibility lens
- 160FPM per module
- Polycarbonate moulded base and lens
- 12V
- 2 bolt mounting
- R10 and R65 approved



Code
30.0009

## 12V Magnetic Blaze Rotating Beacon

- High profile, high visibility lens
- 160 FPM per module
- Magnetic mount
- 12V
- Polycarbonate moulded base and lens
- R10 and R65 approved.



Code
30.0010

# LED BEACONS

## Warrior Magnetic Low-Profile Beacon

- High quality beacon, withstands well against all types of weather
- Smaller than standard beacon
- To be paired with adaptor lead for the magnetic mount beacon
- Magnetic



Colour	Code
Beacon	30.3045-W
Adaptor Lead	30.2020

## Mini Xenon Forklift Beacon

- High quality beacon, withstands well against all types of weather
- Mini sized beacon



Code
30.3053

## 12/24V 3-Bolt Amber LED

- 16 high-intensity 3 W LEDs
- 11 flash patterns
- 80/65 fpm (flashes per minute)
- Polycarbonate lens
- 3-bolt mount



Code
30.3009

## 12/24V Amber Vigil LED with Bracket

- Dual-voltage 12/24 V (10-20 VDC)
- High-brightness 100,000 hour rated LEDs
- Beacons may be connected together for synchronous or alternate flash patterns
- IP67 rated with ultra-low power consumption
- Polycarbonate lens and base



Code
30.3010

## THE MULTI-FUNCTIONAL DUAL BEACON

The all-in-one beacon. Saving you time and money.

**GO TO PAGE 7**

# LED BEACONS

## Seat Belt Indicator Kits

- Two-point locking seat belt for construction plant machinery
- If using a beacon, it indicates when a seat belt is being worn
- Complete with anti-cinch feature to eliminate over-tightening
- Available separately or as a kit (see list)



## Seat Belt Indicator without Beacon (Flexible Receiver)

Code

40.4038-WB



Description	Code
Seat Belt Indicator Kit without Beacon (Fixed Receiver)	40.4024-WB
Seat Belt Indicator - Mag Mount/3-Bolt LED Beacon	40.4024MAL
Seat Belt Indicator - Pole Mount LED Beacon	40.4024PML
Seat Belt Indicator - Single-Bolt LED Beacon	40.4024SBL
Seat Belt Indicator - Flexi Pole Mount LED Beacon with Flexible Receiver	40.4024FPL-FR
Seat Belt Indicator - Single-Bolt LED Beacon with Flexible Receiver	40.4024SBL-FR
Seat Belt Indicator - Single-Bolt LED Beacon with Relay	40.4024SBL-R
Seat Belt Indicator - Flexi Pole LED Beacon with Relay	40.4024FPL-R
Seat Belt Indicator - Flexi Pole LED Beacon with Screw Din Pole Bracket	40.4024FPL-B
Seat Belt Indicator - Single Bolt Rotating Beacon	40.4024SBR

## Beacon Parts and Spares

### Fold-Down Fixing Bracket for Din Pole

Code

30.2009



### Screw Fixing Bracket for Din Pole

Code

30.2004



### Welded Fixing Bracket for Din Pole

Code

30.2007



### Side Fixing Bracket for Din Pole

Code

30.2008



### Straight Fixing Bracket for Din Pole

Code

30.2006



### Din Socket for Universal Plug

Code

30.2012



### 0.6-3m Extension Cable

Code

30.2005



### Battery Adapter

Code

30.2010




### Universal Plug

Code

30.2011



# ONE BEACON TWO COLOURS

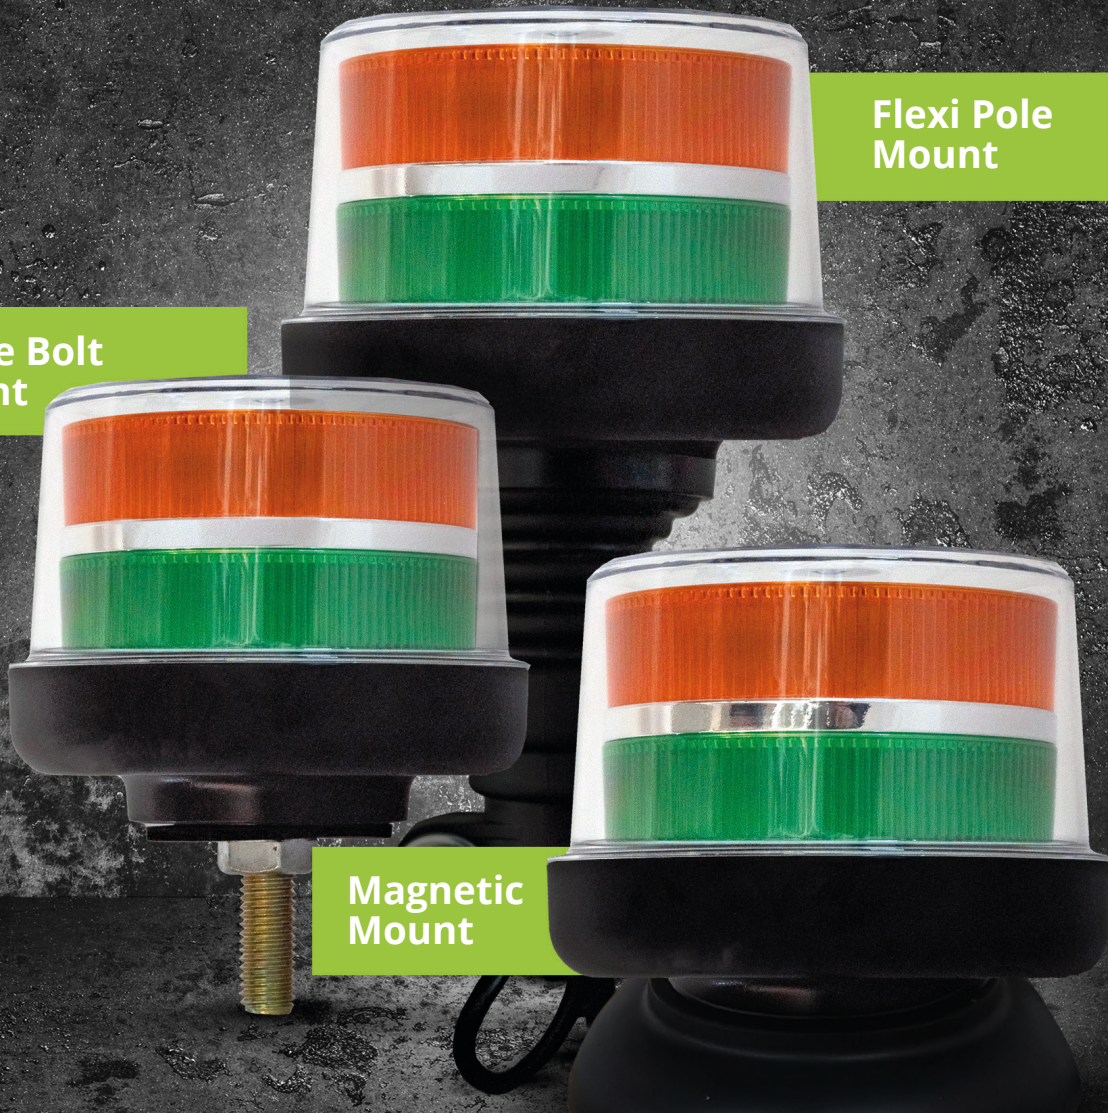

Single Bolt  
Mount

Flexi Pole  
Mount

Magnetic  
Mount

## The Combination Beacon

Our Proline® Dual Beacon removes the need for two separate beacons by combining them together in a cost-effective and compact design.

Dual Beacon with Bolt	30.3051
Dual Beacon with Flexi Pole	30.3050
Dual Beacon with Magnet	30.3052

### Features:

- DC 9-30 V
- Inside top: amber/inside bottom: green
- Outer lens is clear
- IP rating: IP66
- ECE R10


Place your order today by calling our team on **01206 795949** or email us at [sales@ate-uk.com](mailto:sales@ate-uk.com)



# LED AND ROTATING LIGHTBARS

## Warrior 600mm LED Light Bar

- 600 mm LED light bar
- Bolt fixing



**Code**

30.3054

## 1140mm Low-Profile LED Light Bar

- 12/24 V
- 18 x 4 high-powered 1 W LED modules
- 4-bolt fixing option
- Current draw at 12 V is 3 A
- 8 selectable flash patterns
- E-mark approved
- 86 x 94 x 1140 mm



**Code**

30.3018

## LED High-Intensity Mini Light Bar

- DC 12/24 V
- 44 x 1 W high-intensity LEDs
- 26 flash patterns
- R10 approved
- IP65 approved
- -30°C to +50°C temperature range
- Comes with cigar plug and curly lead



**Code**

30.3029

## Amber LED 600mm Low-Profile Light Bar

- 12/24 V
- 56 x 3 W LEDs
- 26 flash patterns
- R65 approved
- R10 approved
- IP65 protection standards
- Magnetic base
- Comes with cigar plug and cable



**Code**

30.3016

## R65 LED 2-Bolt Mini Light Bar

- DC 12/24 V
- 30 x 3 W LEDs
- 26 flash patterns
- R65 approved
- R10 approved
- IP65 protection standards
- -30°C to +50°C temperature range



**Code**

30.3042

## R65 LED Magnetic Mini Light Bar

- DC 12/24 V
- 30 x 3 W LEDs
- 26 flash patterns
- R65 approved
- R10 approved
- IP65 protection standards
- -30°C to +50°C temperature range



**Code**


30.3041

\*Next working day delivery is guaranteed for UK mainland customers only and on orders placed before 4:30pm

# 360° VISIBILITY AT ALL TIMES

## LED Corner Strobe

30.3047

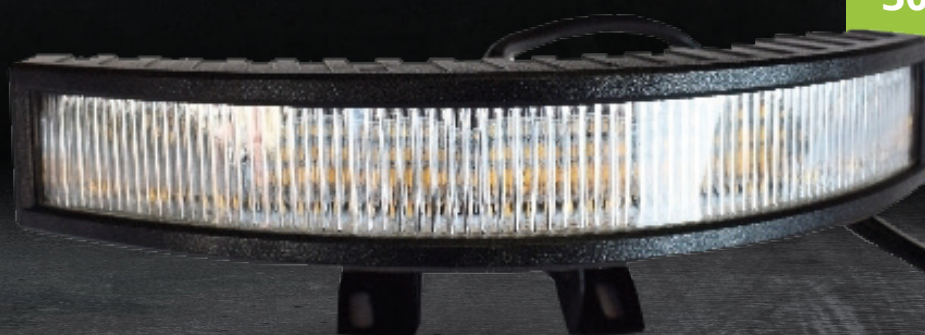

## LIGHTING EVERY CORNER

Proline® LED corner beacon is compliant for highway use and easy to install on vehicles with roof racks, to replace traditional beacons. Using all four lights provides 360° warning coverage.

Proline® LED corner strobe

30.3047

### Features:

- -30°C to +60°C temperature range
- 26 selectable flash patterns
- Surface or bracket mounting
- Dual-voltage 12/24 V
- Max power: 14 W
- ECE R65/R10
- 12 LEDs
- IP67

Place your order today by calling our team on **01206 795949** or email us at [sales@ate-uk.com](mailto:sales@ate-uk.com)

# SURFACE MOUNTED BEACONS

## 12/24V Surface-Mounted LED

- 3x3 W LEDs
- 14 selectable flash patterns
- DC 12-24 V
- ECE R10 approved
- IP67 dust & water protection
- -30°C to +50°C temperature range

Code

30.3019



## 12/24V LED Single Bolt/Magnetic

- 24x1 W LEDs
- DC 12-24 V
- 8 flash patterns
- ECE R10 approved
- IP65 protection standards
- Alternative bolt fixing
- -30°C to +50°C temperature range

Code

30.3021



## 12/24V Surface-Mounted LED

- An LED surface-mounted beacon that is dual-voltage
- 20 high-intensity LEDs
- 15 flash patterns
- Synchronisation capability

Code

30.3002



## 12/24V Surface-Mounted LED

- 4x3 W LEDs
- 14 selectable flash patterns
- DC 12-24 V
- ECE R10 approved
- ECE R65 approved
- IP67 dust & water protection
- -30°C to +50°C temperature range

Code

30.3036




## 12/24V R65 LED Surface-Mounted

- A dual-voltage R65 LED amber surface-mounted beacon
- 9 flash patterns
- 3 LEDs
- IP67

Code

30.3035



## LED Scenelite

- 1248 Lumens
- Compact design covering over 20m<sup>2</sup>
- Solid aluminium base
- Multi voltage (10-32V)
- Waterproof to IP67
- ECE R10 approved
- 182mm (L) x 50mm (W) x 20mm (H)

Code

27.9040



# ELECTRICAL TESTER

## Proline® Electrical Tester

Compatible with both 7 and 13 Pin connectors and with a reverse light check, the Proline® Trailer Light Tester makes it easy for you to test your lights with just one touch to start the sequence - and with just one person! Complete with adapter and charger, the unit boasts an auto shut-off and now comes with an earth terminal and automatic reset.


- Compatible with both 7 & 13 pin connectors
- Reverse light check
- One-touch sequence test/single check
- Comes with charger and adapter
- Built-in battery complete with low battery indicator
- Turns off automatically
- Earth terminal & automatic reset

Code	Desc
26.4011	Complete Tester
26.4008	Battery
26.4009	Charger



## PARTSFINDER

OUR ONLINE SEARCH TOOL HERE  
TO HELP YOU FIND THE RIGHT PART

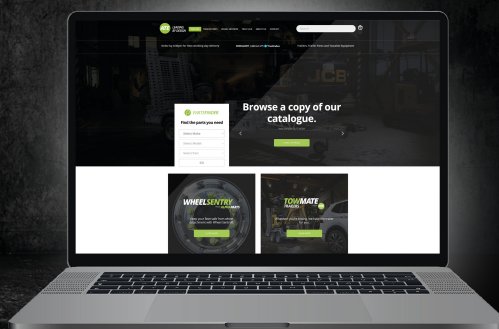

# LED WORKLAMPS

## LED Worklamp with Mounting Bracket

- 12/24 V
- 8 x 3 W LEDs
- Epistar LED chips and flood beam
- 1200 effective lumens
- ECE R10 approved
- IP67 protection standards
- DC 10-30 V
- Strong diecast aluminium housing



Code

27.9025

## LED Worklamp with Magnetic Base

- 12/24 V
- 5 x 3 W LEDs
- 2 light levels and strobe feature
- Strong diecast aluminium housing
- 1080 effective lumens
- ECE R10 approved
- IP67 protection standards
- Comes with mains and car charger



Code

27.9032

## LED Floodlamp with Mounting Bracket

- 12/24 V
- 5 x 3 W LEDs
- Effective lumen: 800 LM
- ECE R10 approved
- IP67 protection standards
- Strong diecast aluminium housing
- Flood beam



Code

37.9031



## TRADE ACCOUNT

Want access to exclusive trade discount? Sign up for FREE

## LED Floodlamp with Mounting Bracket

- 12/24 V
- 9 x 3 W LEDs
- DC 10-30 V
- Epistar LED chips and flood beam
- Strong diecast aluminium housing
- 1400 effective lumens
- ECE R10 approved
- IP67 protection standards



Code

27.9028

## LED Rubber Handlamp with Hook (chargeable)

- Super bright COB handlamp
- 3 W COB 270-360 lumens (plus 5 LEDs in the head)
- Adaptor DC 12 V and AC 230 V
- 3-4 hours running time
- Flexible 180° with two hooks and three magnets



Code

38.0023

# LED WORKLAMPS

## Round Worklamp W/ Magnetic Base

Code

38.0018



## Warrior Round Worklamp W/ Magnetic Base

Code

38.0018-W



## Round Rubber Worklamp

Code

38.0019



## Small Square Halogen Worklamp

Code

38.0020



# HORNS

## Disc Horn

Code Desc

40.3004 High Tone

40.3005 Low Tone



## Wintone Horns

Code Desc

40.3006 Windtone Horns

40.3009 High Tone

40.3010 Low Tone



# REVERSE ALARMS & CAMERA SYSTEMS

20 M  
EXTENSION  
CABLE  
INCLUDED



## Full Reversing Camera Systems

This reversing camera system delivers excellent picture quality even in low light. The compact monitor includes a sunshade, remote control and allows for unobtrusive installation without compromising viewable screen area.

- 7" digital TFT monitor with aspect ratio 16:9 image
- Contrast ratio: 300:1 and brightness: < 250 cd/m<sup>2</sup>
- Automatic light sensor adjustment
- Multi-language display, OSD menu, remote control
- Power supply: DC 12/24 V
- Monitor and camera sunshade visors with monitor stand bracket
- 4-pin connector for rear-view camera
- Night vision: minimum illumination 0.01 lux

Description	Code
Full reversing camera system	40.4037
20 m cable to suit	40.4066
Camera to suit	40.4065
Monitor to suit	40.4064

20 M CABLE  
TO SUIT



CAMERA  
TO SUIT



MONITOR  
TO SUIT



## Proline® Medium Duty Reverse Alarm

- -30°C to +50°C temperature range
- Fully weatherproof and pressure washable
- Multi-voltage 12-80 V DC
- 92-107 dB sound level
- Reverse polarity protected
- Nylon housing



Code

40.4020

## Reverse Alarm

- Dual-voltage 12/24 V
- Wire connector
- SAE Type C approved
- R10 approved
- IP65 approved
- Nylon housing
- 97 dB sound level



Code

40.4009

## White Noise Reverse Alarm



Code

40.4079

# REVERSE ALARMS & CAMERA SYSTEMS

## Light Duty White Sound Reverse Alarm (87 DB)



Code

40.4030

## Medium Duty White Sound Reverse Alarm (92 DB)



Code

40.4031

## Medium Duty White Sound Reverse Alarm (97 DB)



Code

40.4032

4 X 20 M  
EXTENSION  
CABLE  
INCLUDED

## Quad Reversing Camera Systems

Comprising of a feature-packed 7" LCD high-resolution colour monitor with internal controller and infrared colour cameras, this package enables continuous event and accident monitoring with a quad-view screen. The set includes monitor & camera sunshades, remote control and 4 waterproof night vision cameras.

- Full-screen image, two image and four image options with built-in speaker
- Four-way video input, one-way audio input
- Automatic light sensor adjustment & multi-language display
- Power supply: DC 9-24 V
- Monitor stand bracket & 4-pin camera connectors
- Reference point and time control for reverse gear settings
- Image sensor: Sony CCD



Description

Code

Quad reversing camera system 40.4062

20 m cable to suit 40.4066

Camera to suit 40.4065

20 M CABLE  
TO SUIT



CAMERA  
TO SUIT





# BATTERIES & ACCESSORIES

## Fully Insulated Quick Release Battery Clamps



Part No.	Description
38.1001	Fully Insulated Quick Release Battery Clamps (Pair)

## Heavy Duty Insulated Crocodile Clips



Part No.	Description
38.1007	Black Heavy Duty Insulated Crocodile Clip
38.1008	Red Heavy Duty Insulated Crocodile Clip

## Booster Cables




Part No.	Description
38.1003	3m 260 Amp Booster Cable
38.1004	4m 500 Amp Booster Cable
38.1005	5m 480 Amp Booster Cable
38.1006	4.5m 600 Amp Booster Cable

## Heavy Duty Power Pack & Jump Start



Part No.	Description
38.1009	Heavy Duty Power Pack and Jump Start, suitable for petrol vehicles up to 3000cc and diesel vehicles up to 2200cc.

## Power Inverters



Part No.	Description
26.8001	150W Power Inverter with USB
26.8002	300W Power Inverter with USB
26.8003	500W Power Inverter with USB
26.8004	1000W Power Inverter 12V/230v
26.8005	1500W Power Inverter 12V/230V With USB

## Battery Terminal Stud Type



Part No.	Description
38.1016	Battery Terminal Stud Type (8mm Stud) Negative
38.1017	Battery Terminal Stud Type (8mm Stud) Positive

## Battery Testing Hydrometer



Part No.	Description
38.1002	Battery Testing Hydrometer (1.10 to 1.30 g/ml)

## Battery Monitor



Part No.	Description
38.1018	Battery Monitor - 6v/12v/24v Smart Bluetooth Monitor

# BATTERIES & ACCESSORIES

## Battery Connectors



Part No.	Description
38.1011	Positive Battery Connector. 9.5mm diameter (40mm <sup>2</sup> cable). Heavy pattern, tin plated brass
38.1012	Negative Battery Connector. 9.5mm diameter (40mm <sup>2</sup> cable). Heavy pattern, tin plated brass

**PARTSCHAT**

**CAN'T FIND THE RIGHT PART?  
SPEAK TO OUR EXPERTS ONLINE**

## Smart Chargers



**NEW**

Part No.	Description
38.1019	Electronic Smart Charger 4a 6/12v
38.1020	Electronic Smart Charger 6a 12v
38.1021	Electronic Smart Charger 8a 12/24v
38.1022	Electronic Smart Charger 15a 12/24v

## Automotive Batteries



Part No.	Description	Length	Width	Height
38.4071	12V 60Ah 480Cca (014/005R)	230mm	170mm	223mm
38.4072	12V 45Ah 450Cca (063)	208mm	175mm	175mm
38.4073	12V 70Ah 540Cca (031/069)	266mm	172mm	220mm
38.4074	12V 72Ah 610Cca (072/082/086)	277mm	174mm	190mm
38.4075	12V 95Ah 720Cca (335/249)	302mm	172mm	220mm
38.4076	12V 115Ah 1000Cca (640)	330mm	172mm	242mm
38.4077	12V 60Ah 480Cca (005L)	230mm	172mm	220mm
38.4078	12V 62Ah 540Cca (027/013)	242mm	174mm	190mm
38.4079	12V 95Ah 720Cca (335/250)	302mm	172mm	220mm
38.4080	12V 72Ah 610Cca (096/100)	277mm	174mm	190mm
38.4081	12V 68Ah 570Cca (067)	277mm	174mm	175mm
38.4085	12V 70Ah 540Cca (030/068)	257mm	172mm	220mm
38.4086	12V 62Ah 510Cca (075)	242mm	174mm	175mm
38.4087	12V 85Ah 720Cca (017/024)	354mm	174mm	175mm
38.4088	12V 145Ah 800Cca (627)	511mm	188mm	217mm
38.4094	12v 38Ah 300Cca (015/038)	243mm	127mm	205mm

## Duracell Batteries




**PACK OF 10**

Part No.	Description
38.4051	Duracell AAA Batteries (8Pk)
38.4049	Duracell AA Batteries (8Pk)

# BATTERIES & ACCESSORIES

## Victron Energy Battery Protect



Part No.	Description
38.1014	Victron Energy Battery Protect 12/24v 65a
38.1015	Victron Energy Battery Protect 12/24v 100a

NEW

## Automatic Workshop Charger



Part No.	Description
38.1023	Automatic Workshop Charger With Start Assist 20a/150a 12v/24v

NEW

## Lithium-Ion Power Pack



Part No.	Description
38.1024	Lithium-Ion Power Pack With Digital Display 600a

## Battery To Suit VB9 Lighting Tower



Part No.	Description
38.4102	Battery To Suit VB9 Lighting Tower

## Deep Cycle AGM Battery 12V 140AH



Part No.	Description
38.4106	Deep Cycle AGM Battery 12V 140AH

## Positive / Negative Battery Connectors



Part No.	Description
38.1010	Positive / negative battery connectors

## 13 Amp Plug



Part No.	Description
38.1013	13 Amp Plug (Thermoplastic Rubber - Black)



**IN A RUSH? ORDER ONLINE TODAY GET IT DELIVERED NEXT WORKING DAY\***

\*For UK mainland customers only and on orders placed before 4:30pm.



**RIGHT PART,  
ON TIME,  
EVERY TIME.**



**T:** 01206 795949

**E:** sales@ate-uk.com

**w:** ate-uk.com



**ATE (UK) Ltd**

Anglia House, Haven Road,  
Colchester, Essex, CO2 8HT

**SCAN FOR OUR  
WEBSITE!**

